

Vertical balers

X-series X25



FOR LARGER DEMANDS


The X25 is equipped with cross cylinders, giving you stable compression and superior press force, together with a low overall height. Combined with a long stroke, a high bale weight can be achieved.

This baler is designed with easy servicing in mind, for example the positioning of the hydraulic unit mounted below the control panel on the side of the machine.



Technical specifications

Press force (t)	25
Power supply	3x230/400V 50Hz 25/16A
Motor (kW)	4.0
Noise level (dB)	59-60
Cycle time (sec)	23
Dimensions WxDxH (mm)	1745 x 1260 x 1995
Weight (kg)	1410
Filling opening WxH (mm)	1090 x 530
Filling height (mm)	955
Chamber height (mm)	1380
Stroke (mm)	950
Bale size WxDxH (mm)	1200 x 800 x 800
Bale weight cardboard (kg)	250-300
Bale weight plastic (kg)	300-400

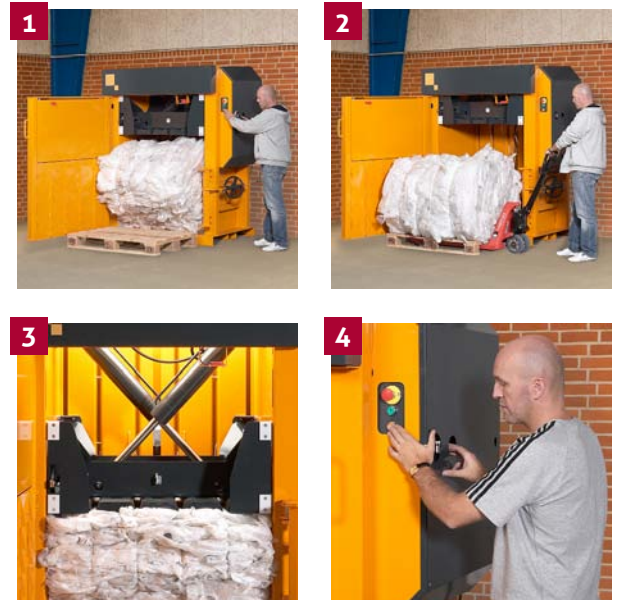

1 Compact your waste and eject the finished bale. **2** Remove and store the bale until collection. **3** The cross cylinders ensure stable compression and a low overall height. **4** The bale is ejected by a safe two-hand operation.

- **Noiseless**
Due to an unique hydraulic system
- **Safe and steady opening of door**
Operated by a strong threaded spindle
- **Easy installation**
Very low overall height

BRAMIDAN[®]
www.bramidan.com

Elkoplast CZ, s.r.o.
Štefánikova 2664
760 01 Zlín
Tel. +420 575 571 000
Fax +420 575 571 099
elkoplast@elkoplast.cz
www.elkoplast.cz